

C-DP4K-EXT

4K Displayport Repeater



Displayport Repeater and Signal Enhancer


KEY FEATURES

- Supports DP v1.1a and DP v1.2 Signal including HBR2;
- Data Rates to 5.4Gbps;
- DisplayPort Connector Input/Outputs : 20-pin female;
- Supports resolutions of up to 3840x2160@60Hz;
- DPCD signal compliant;
- External power supply insuring reliable uninterrupted signal;
- Dual mode is not supported,
- Plug and Play no setup needed;
- Compact design;
- Metal casing;


C-DP4K-EXT

CABLE INDEX
■ Input / Output

4K(3840x2160)@60Hz

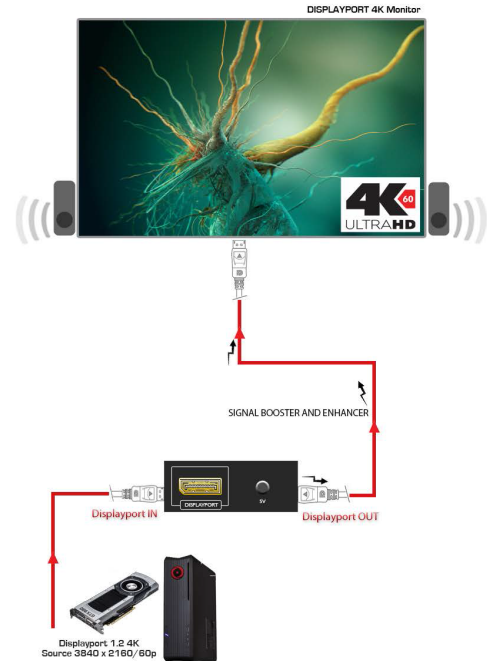

PANEL DESCRIPTION

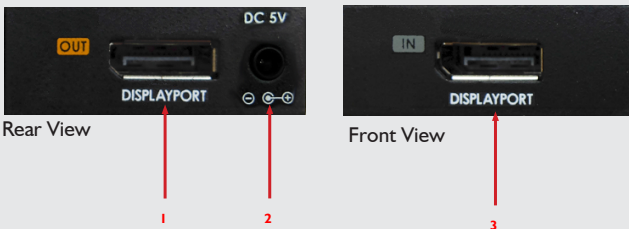

1 Displayport OUT

2 Power Supply: 5V 2A

3 Displayport IN

ITEM	SPECIFICATION
Model	C-DP4K-EXT
Model Description	4K Displayport signal repeater and enhancer
Displayport Version	1.2a
Video Bandwidth	4 lanes, 21.6 Gbps(HBR2)
Displayport Interface	20 pin DisplayPort(female)
Supported Resolution	Up to 3840x2160@60Hz
Dimensions	2" (W) x 0.6" (D) x 2" (H)
Weight	0.17 lbs
Chassis Material	Metal
Color	Black
Power Supply	5V 2A
Operating Temperature	0°C~40°C/32°F~104°F
Storage Temperature	-20°C~60°C/-4°F~140°F
Relative Humidity	20~90% RH (non-condensing)



VIDEO WALL VIDEO PROCESSORS
MULTIVIEWERS DIGITAL SIGNAGE
EXTENDERS CONTROL CENTERS
SCALERS WIRELESS

Toll Free 1.866.508.0269 | sales@avenview.com

