



## 3G/HD/SD-SDI to HDMI Converter



Model #: 3G/HD/SD-SDI to HDMI Converter

© 2010 Avenview Inc. All rights reserved.

The contents of this document are provided in connection with Avenview Inc. ("Avenview") products. Avenview makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication and reserves the right to make changes to specifications and product descriptions at any time without notice. No license, whether express, implied, or otherwise, to any intellectual property rights is granted by this publication. Except as set forth in Avenview Standard Terms and Conditions of Sale, Avenview assumes no liability whatsoever, and disclaims any express or implied warranty, relating to its products including, but not limited to, the implied warranty of merchantability, fitness for a particular purpose, or infringement of any intellectual property right. Reproduction of this manual, or parts thereof, in any form, without the express written permission of Avenview Inc. is strictly prohibited.

## Table of Contents

Section 1: Getting Started .....	3
1.1 Important Safeguards .....	3
1.2 Safety Instructions .....	3
1.3 Regulatory Notices Federal Communications Commission (FCC) .....	4
1.4 Introduction .....	4
1.5 Package Contents.....	5
1.6 Before Installation.....	5
1.7 Panel Description .....	6
1.7.1 Front Panel .....	6
1.7.2 Rear Panel .....	6
1.7.3 Bottom Panel (DIP SWITCH) .....	7
Section 2: Specifications.....	8
2.1 Supported Resolutions.....	9

## Section 1: Getting Started

### 1.1 Important Safeguards

Please read all of these instructions carefully before you use the device. Save this manual for future reference.

#### What the warranty does not cover

- Any product, on which the serial number has been defaced, modified or removed.
- Damage, deterioration or malfunction resulting from:
  - Accident, misuse, neglect, fire, water, lightning, or other acts of nature, unauthorized product modification, or failure to follow instructions supplied with the product.
  - Repair or attempted repair by anyone not authorized by us.
  - Any damage of the product due to shipment.
  - Removal or installation of the product.
  - Causes external to the product, such as electric power fluctuation or failure.
  - Use of supplies or parts not meeting our specifications.
  - Normal wear and tear.
  - Any other causes which does not relate to a product defect.
- Removal, installation, and set-up service charges.

### 1.2 Safety Instructions

The Avenview C-3GHDSDI-HDMI, 3G/HD/SD-SDI to HDMI Converter has been tested for conformance to safety regulations and requirements, and has been certified for international use. However, like all electronic equipment's, the C-3GHDSDI-HDMI should be used with care. Read the following safety instructions to protect yourself from possible injury and to minimize the risk of damage to the unit.

- Do not dismantle the housing or modify the module.
- Dismantling the housing or modifying the module may result in electrical shock or burn.
- Refer all servicing to qualified service personnel.
- Do not attempt to service this product yourself as opening or removing housing may expose you to dangerous voltage or other hazards
- Keep the module away from liquids.
- Spillage into the housing may result in fire, electrical shock, or equipment damage. If an object or liquid falls or spills on to the housing, unplug the module immediately.
- Have the module checked by a qualified service engineer before using it again.
- Do not use liquid or aerosol cleaners to clean this unit. Always unplug the power to the device before cleaning.

## 1.3 Regulatory Notices Federal Communications Commission (FCC)

This equipment has been tested and found to comply with Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

Any changes or modifications made to this equipment may void the user's authority to operate this equipment.

## 1.4 Introduction

The Avenview C-3GHDSI-HDMI provides a cost effective way to convert 3G/HD/SD-SDI signal to HDMI compliant format. The conversion between SDI and HDMI is pure digital and guarantees no loss transformation for both audio and video. Plus, with up to 8 channels audio support, 7.1 channel or 5.1 channel audio becomes available. The C-3GHDSI-HDMI also provides 2 low jitter and re-clocked outputs for daisy chain or multiple monitors.

# C-3GHDSI-HDMI

### CABLE INDEX

- Output
- Input / Source
- S/PDIF
- Audio
- RS-232
- IR
- CAT-5 / CAT-6
- DVI Loop



- Supported 3G formats(SMPTE 425M, Level A):  
1080p @50/59.94/60Hz (4:2:2)
- Supported high-definition (HD) formats:  
1080i @50/59.94/60Hz, 1035i @50/59.94/60Hz, 720p @50/59.94/60Hz
- Supported standard-definition (SD) formats: NTSC @59.94Hz, PAL @50Hz
- Auto 3G/HD/SD-SDI detection
- Two equalized and re-clocked loop outputs
- External DIP Switch Configuration

## 1.5 Package Contents

Before you start the installation of the converter, please check the package contents.

- |                             |     |
|-----------------------------|-----|
| - C-3GHDSI-HDMI             | x 1 |
| - Power Adapter (+5VDC, 4A) | x 1 |
| - User's Manual             | x 1 |

## 1.6 Before Installation

- Put the product in an even and stable location. If the product falls down or drops, it may cause an injury or malfunction.
- Don't place the product in too high temperature (over 50°C), too low temperature (under 0°C) or high humidity.
- Use the DC power adapter with correct specifications. If inappropriate power supply is used then it may cause a fire.
- Do not twist or pull by force ends of the optical cable. It can cause malfunction.


## 1.7 Panel Description

### 1.7.1 Front Panel



1. 3G/HD/SD-SDI Input	2. Lock LED
3. 3G/HD/SD-SDI Loop Out 1	4. 3G/HD/SD-SDI Loop Out 2

### 1.7.2 Rear Panel

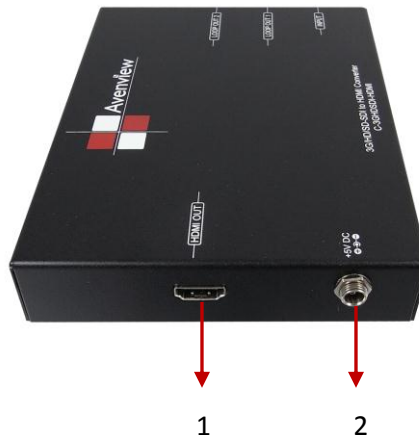

1. HDMI Output	2. 5V Power Jack
----------------	------------------

### 1.7.3 Bottom Panel (DIP SWITCH)

A 4-pin DIP switch is used for user interface, and users can access this switch from the bottom of the unit. Output formats, video patterns, SD Pedestal, SD Wide, PAL mode, YPbPr / RGB, SD component or SD composite, YC on/off etc.

PIN #	1	2	3	4
OFF ↑	HDMI Mode	7.1 Channel	Audio Group 1 & 2	Audio Mute OFF
ON ↓	DVI Mode	Stereo	Audio Group 3 & 4	Audio Mute ON

1. C-3GHDSI-HDMI mainly checks the audio channel in audio group 1&2 or 3&4. Please adjust DIP switch pin 3 for setup.
2. Some HDMI equipped TV may not be able to decipher multiple channel audio, and therefore set DIP switch pin-2 to ON(↓) to get stereo audio work and then check if multiple channel support is available.
3. While DIP Switch pin-4 is set to OFF(↑), 3G Level B will be automatically converted to Level A.
4. C-3GHDSI-HDMI supports only audio sample frequency 48kHz.
5. While stereo audio is chosen, CH 1 & 2 of Group 1 or 3 are output.

## Section 2: Specifications

Item	Description
<b>Units</b>	C-3GHDSDI-HDMI
<b>Unit Description</b>	3G/HD/SD-SDI to HDMI Converter
<b>SDI Standards</b>	3G-SDI, HD-SDI, SD-SDI
<b>Auto 3G/HD/SD-SDI Detection</b>	Yes
<b>Video Bandwidth</b>	<b>3G:</b> 1080p @50/59.94/60Hz (4:2:2) <b>HD:</b> 720p @50/59.94/60Hz, 1035i @50/59.94/60Hz, 1080i @50/59.94/60Hz <b>SD:</b> NTSC @59.94Hz, PAL @50Hz
<b>Input Signal</b>	<b>3G-SDI:</b> SMPTE 424M/425M <b>HD-SDI:</b> SMPTE 292M, 296M <b>SD-SDI:</b> SMPTE 259M
<b>Output Signal</b>	HDMI
<b>Audio Mode</b>	7.1 / 5.1 / Stereo
<b>Eye Pattern Characteristics</b>	Extra low alignment jitter 0.05µi at HD
<b>Cable Equalization</b>	<b>3G-SDI:</b> up to 60m (200 feet) <b>HD-SDI:</b> up to 150m (500 feet) <b>SD-SDI:</b> up to 300m (1000 feet)
<b>Loop Out</b>	2 equalized and re-clocked SDI Loop Outs
<b>Audio Support</b>	Yes
<b>Input</b>	BNC x 1 (SDI)
<b>Output</b>	HDMI x 1 BNC x 2 (SDI)
<b>BNC Connector</b>	3G 75Ω inter-locked socket
<b>HDMI Connector</b>	Type A (19 pin female)
<b>DIP Switch</b>	4 pin (output format / audio format / audio group / 3G level)
<b>Dimensions (L x W x H)</b>	6.9" X 4.7" x 1"
<b>Power Supply</b>	5V 4A DC
<b>Power Consumption</b>	3 Watts (max)
<b>Environmental</b>	
<b>Operating Temperature</b>	32° ~ 104°F (0° to 40°C)
<b>Storage Temperature</b>	-4° ~ 140°F (-20° ~ 60°C)
<b>Relative Humidity</b>	20~90% RH (no condensation)



## 2.1 Supported Resolutions

<b>3G-SDI Input</b>	
1080p @ 60/59.94/50Hz	C- SMPTE 425M (4:2:2)
<b>HD-SDI Input</b>	
720p @ 50Hz	SMPTE 296M -3
720p @ 60 / 59.94Hz	SMPTE 296M -1, -2
1080i @ 25Hz	SMPTE 274M -6
1080i @ 30 / 29.97Hz	SMPTE 274M -4, -5
1080p @ 24 / 23.98Hz	SMPTE 274M -10, -11
1080p @ 25Hz	SMPTE 274M -9
1080p @ 30 / 29.97Hz	SMPTE 274M -7, -8
<b>SD-SDI Input</b>	
NTSC	
PAL B, D, G, H, I	



**Disclaimer**

While every precaution has been taken in the preparation of this document, Avenview Inc. assumes no liability with respect to the operation or use of Avenview hardware, software or other products and documentation described herein, for any act or omission of Avenview concerning such products or this documentation, for any interruption of service, loss or interruption of business, loss of anticipatory profits, or for punitive, incidental or consequential damages in connection with the furnishing, performance, or use of the Avenview hardware, software, or other products and documentation provided herein.

Avenview Inc. reserves the right to make changes without further notice to a product or system described herein to improve reliability, function or design. With respect to Avenview products which this document relates, Avenview disclaims all express or implied warranties regarding such products, including but not limited to, the implied warranties of merchantability, fitness for a particular purpose, and non-infringement.