

MLT-SPLITPRO-T4K

6X2 4K@60Hz Quad Multiviewer
with Audio Support (IR/RS232/TELNET)



6X2 4K@60 SWITCHER

KEY FEATURES

- Dual 4K@60 outputs, HDMI for fullscreen with PIP/POP/multiview and DisplayPort for fullscreen monitoring;
- Fast switching between input channels and between full screen/multiview;
- Handle HDMI® signals with Deep Color and HDCP 1.4/2.2 also handle VGA, and DisplayPort sources;
- Supports input resolutions up to 4K@60Hz, 4:4:4 color sampling;
- Supports output resolutions up to 4K@60Hz, 4:4:4 color sampling;
- Supports upscaling up to 4K@60Hz, 4:4:4 color sampling;
- Supports PIP, POP and multi-view layout configurations;
- Supports 14 different screen layouts by 6 preset screen layouts and extra 8 customized screen layouts;
- Rotation (R90° and L90°) when input resolution up to 1080p and flip output in full screen layout;
- Receives Dolby Digital® 5.1, DTS® 5.1 and uncompressed 7.1 linear PCM audio includes stereo analog audio input;
- Supports stereo audio output;
- Control through front panel button, IR remote control, RS232, Telnet and Web UI;
- Supports USB firmware upgrade;


MLT-SPLITPRO-T4K

6 PRESET LAYOUTS PLUS
8 CUSTOM LAYOUTS!

UHD 4K@60Hz 4:4:4
14 Different Layouts




UHD 4K@60Hz 4:4:4
Fullscreen Monitor

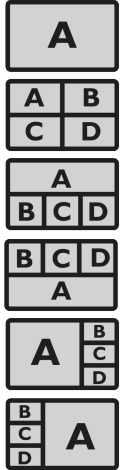

CABLE INDEX

- Input/Output
- Audio
- Cat5e/6
- RS-232

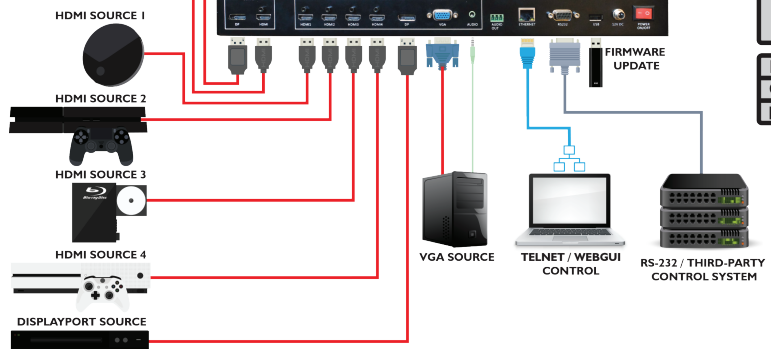

PANEL DESCRIPTION


FRONT



BACK



- 1 IR Receiver
- 2 Input Select
- 3 Layout Select
- 4 Input Swap
- 5 Panel Lock
- 6 Standby/Off
- 7 Output Ports
- 8 Input Ports
- 9 Audio Out
- 10 Telnet Port
- 11 RS-232
- 12 USB Port
- 13 12V DC
- 14 Power Switch



ITEM

SPECIFICATION

Unit	MLT-SPLITPRO-T4K
Input Video Port	HDMI 2.0 x4, DisplayPort 1.2 x1, VGA x1
Input Resolution	FHD 1920x1080@60Hz, UHD 3840x2160@60Hz
Output Video Port	HDMI 2.0 x1, DisplayPort 1.2 x1
Output Resolution	Upto 4096x2160@60Hz, 4:4:4 color sampling
Input Audio Port	3.5mm Stereo Jack
Output Audio Port	3-Pin Mini-Phoenix Connector
Control Ports	RJ-45 Telnet Jack, DB-9 RS-232 Port, USB Firmware Port
Power Supply	12V/2A DC
Power Consumption	15W
Dimensions	440.4mm x 230mm x 45mm (L x W x H)
Weight	1.3 lbs



VIDEO WALL VIDEO PROCESSORS
MULTIVIEWERS DIGITAL SIGNAGE
EXTENDERS CONTROL CENTERS
SCALERS WIRELESS



Toll Free 1.866.508.0269 | sales@avenview.com