



AV Connectivity, Distribution
And Beyond...

VIDEO WALLS VIDEO PROCESSORS
VIDEO MATRIX SWITCHES
EXTENDERS SPLITTERS WIRELESS
CABLES & ACCESSORIES

HDMI Extender over SignalCAT5/CAT6 Cable



Model #: HDM3D-C53X-SET



© 2012 Avenview Inc. All rights reserved.

The contents of this document are provided in connection with Avenview Inc. ("Avenview") products. Avenview makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication and reserves the right to make changes to specifications and product descriptions at any time without notice. No license, whether express, implied, or otherwise, to any intellectual property rights is granted by this publication. Except as set forth in Avenview Standard Terms and Conditions of Sale, Avenview assumes no liability whatsoever, and disclaims any express or implied warranty, relating to its products including, but not limited to, the implied warranty of merchantability, fitness for a particular purpose, or infringement of any intellectual property right. Reproduction of this manual, or parts thereof, in any form, without the express written permission of Avenview Inc. is strictly prohibited.



Table of Contents

Section 1: Getting Started	3
1.1 Important Safeguards	3
1.2 Safety Instructions	3
1.3 Regulatory Notices Federal Communications Commission (FCC)	4
1.4 Introduction	4
1.5 Package Contents.....	5
1.6 Before Installation.....	5
1.7 Panel Description	6
1.8 Installation	8
1.9 EDID Learning.....	8
1.10 General Troubleshooting	9
Section 2: Specifications.....	9

Technical Support



IF PURCHASED IN



USA OR INTERNATIONAL

PHONE SUPPORT: 1 (866) 508 0269

EMAIL SUPPORT: support@avenview.com

USA Head Office Avenview Corp. 275 Woodward Avenue Kenmore, NY 14217



Section 1: Getting Started

1.1 Important Safeguards

Please read all of these instructions carefully before you use the device. Save this manual for future reference.

What the warranty does not cover

- Any product, on which the serial number has been defaced, modified or removed.
- Damage, deterioration or malfunction resulting from:
- Accident, misuse, neglect, fire, water, lightning, or other acts of nature, unauthorized product modification, or failure to follow instructions supplied with the product.
- Repair or attempted repair by anyone not authorized by us.
- Any damage of the product due to shipment.
- Removal or installation of the product.
- Causes external to the product, such as electric power fluctuation or failure.
- Use of supplies or parts not meeting our specifications.
- Normal wear and tear.
- Any other causes which does not relate to a product defect.
- Removal, installation, and set-up service charges.

1.2 Safety Instructions

The HDM3D-C53X-SET, HDMI Extender with 3D over Signal CAT5 has been tested for conformance to safety regulations and requirements, and has been certified for international use. However, like all electronic equipment, the HDM3D-C53X-SET should be used with care. Read the following safety instructions to protect yourself from possible injury and to minimize the risk of damage to the unit.

- ⚠ Do not dismantle the housing or modify the module.
- ⚠ Dismantling the housing or modifying the module may result in electrical shock or burn.
- ⚠ Refer all servicing to qualified service personnel.
- ⚠ Do not attempt to service this product yourself as opening or removing housing may expose you to dangerous voltage or other hazards
- ⚠ Keep the module away from liquids.
- ⚠ Spillage into the housing may result in fire, electrical shock, or equipment damage. If an object or liquid falls or spills on to the housing, unplug the module immediately.
- ⚠ Have the module checked by a qualified service engineer before using it again.
- ⚠ Do not use liquid or aerosol cleaners to clean this unit. Always unplug the power to the device before cleaning.



1.3 Regulatory Notices Federal Communications Commission (FCC)

This equipment has been tested and found to comply with Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

Any changes or modifications made to this equipment may void the user's authority to operate this equipment.

1.4 Introduction

The Avenview **HDM3D-C53X-SET, HDMI Extender with 3D over Single CAT5 / CAT6** enhances and extends your video/audio transmission distance up to 60m (200ft) in HDTV 1080i format, 40m (130ft) in HDTV 1080p format, and 20m (65ft) in HDTV 1080p with 36-bit color depth. HDM3D-C53X-SET also supports the most advanced 3D video format compliant with HDMI 1.4 specification and therefore guarantees the highest 3D video compatibility on the market. With only one cost effective Cat.5/5e/6 cable, users can readily extend HDTV sources from DVD players, Blu-ray Disc player, PS3, PC, and any other kinds of sources compliant with TMDS to distant display monitors including HDMI or DVI enabled TV sets or LCD PC monitors. With the advanced design for the latest HDMI technology, deep color video, DTS-HD or Dolby TrueHD audio, and HDCP supports and compatibility are all further insured. This flexibility makes HDCP compliant DVD players or PS3 transmit utmost high quality video and audio with a greater distance at the minimal cost, when integrating several components apart

Also known as the HDM3D-C53X-SET consists of Transmitter (HDM3D-C53X-S) and Receiver (HDM3D-C53X-R). The Transmitter (HDM3D-C53X-S) captures the input HDMI/DVI signals and carry the signals through one RJ-45 connector into one cost effective CAT-5/5e/6 LAN cable. The Receiver (HDM3D-C53X-R) equalizes the sent TMDS multimedia data. The transmission distance between the sending and receiving units can be up to 60m (200ft) under HD (720p/1080i) or 40m (130ft) under Full HD (1080p). With an 8-level equalization control knob on the receiving unit, users can adjust the equalization strength to the received TMDS signals accordingly, and therefore optimize the transmission distance between source and destination.

- HDMI compliant [3D video]
- Extend the transmission up to 60m (200ft) from the HDMI source at HD 1080i or 720p 24-bit
- Extend the transmission up to 40m (130ft) from the HDMI source at Full HD 1080p 24-bit
- Extend the transmission up to 20m (65ft) from the HDMI source at Full HD 1080p 36-bit
- HDCP compliant
- Minimize the cable skew by adjustable 8-level equalization control
- Pure unaltered uncompressed 7.1ch digital HDMI over Cat.5/5e/6 cable transmission
- DTS-HD and Dolby True HD high bit rate audio support
- Allows cascading
- Wall mounting housing design for easy and robust installation
- Perfectly integrated with other HDMI over CAT5 series products



1.5 Package Contents

Before you start the installation of the converter, please check the package contents.

- HDM3D-C53X-S x 1
- HDM3D-C53X-R x 1
- Power Adapter x 2
- User's Manual x 1

1.6 Before Installation

- Put the product in an even and stable location. If the product falls down or drops, it may cause an injury or malfunction.
- Don't place the product in too high temperature (over 50°C), too low temperature (under 0°C) or high humidity.
- Use the DC power adapter with correct specifications. If inappropriate power supply is used then it may cause a fire.
- Do not twist or pull by force ends of the optical cable. It can cause malfunction.


HDM3D-C53X-SET

HDM3D-C53X-R

720p/1080i = 50m (165 feet) CAT5
720p/1080i = 60m (200 feet) CAT6
1080p 24bit = 40m (130 feet) CAT5
1080p 24bit = 50m (165 feet) CAT6
1080p 36bit = 20m (65 feet) CAT6


CABLE INDEX

- Output
- Input / Source
- CAT5 / CAT6

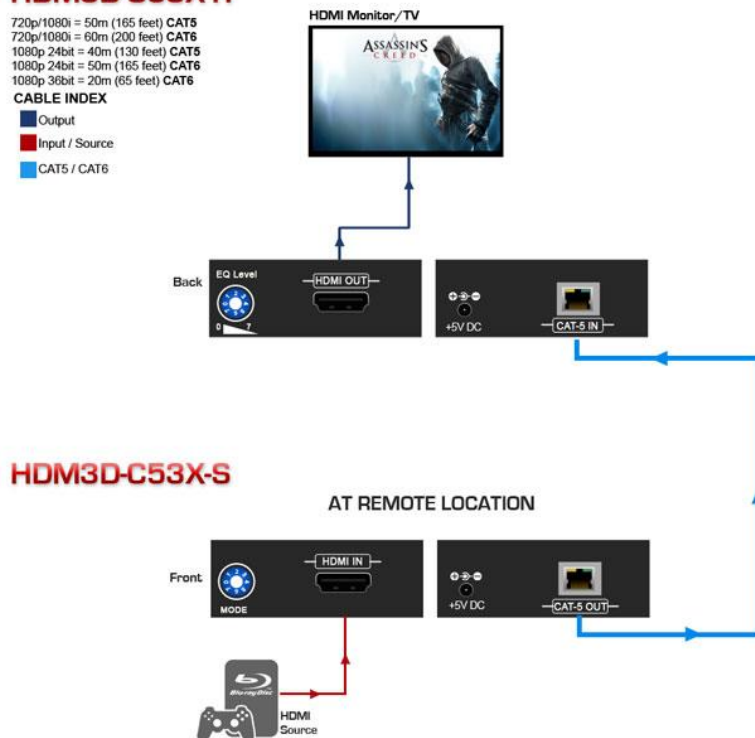

1.7 Panel Description

FRONT PANEL (Transmitter, HDM3D-C53X-S)

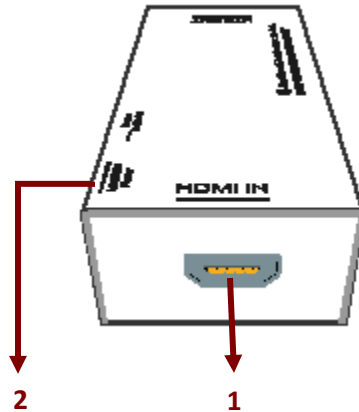


1. HDMI Input	2. Mini USB & 5V DC Power Connector
---------------	-------------------------------------

DIP Switch Under Transmitter				
0	VIDEO	Locks to Full HD 1080p 24-bit	AUDIO	Supports up to 7.1 Channel Output
1	VIDEO	Locks to Full HD 1080p 24-bit	AUDIO	Locks to Stereo Audio Output
2	VIDEO	up to Full HD 1080p 36-bit	AUDIO	Supports up to 7.1 Channel Output
3	VIDEO	up to Full HD 1080p 36-bit	AUDIO	Locks to Stereo Audio Output
4	VIDEO	Locks to HD 720p or 1080i 24-bit	AUDIO	Supports up to 7.1 Channel Output
5	VIDEO	Locks to HD 720p or 1080i 24-bit	AUDIO	Locks to Stereo Audio Output
6	VIDEO	up to 3D Full HD 1080p 36-bit	AUDIO	Locks to Stereo Audio Output
7	EDID Learning	Learns EDID from Display		



REAR PANEL (Receiver, HDM3D-C53X-R)

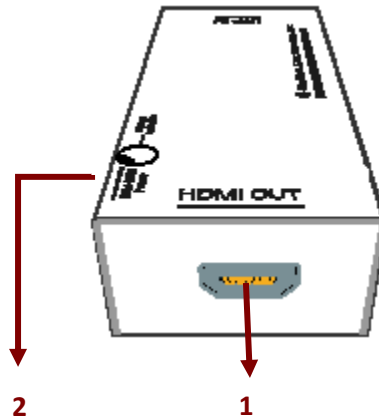

1. HDMI OUT

2. Mini USB & 5V DC Power Connector

DIP Switch HDM3D-C53X-R (Receiver)

Rotary control:

Adjust the 8-level equalization control to the received HDMI signals. The HDMI signal level varies from 0 (strongest) to 7 (weakest) for respective transmission length from longest possible range to short distance. Please adjust the signal level from 7 to 0 and stop turning the rotary switch whenever the audio/video is playing normally. Inappropriate signal level setting may cause overpowering issue that would shorten the product life significantly!

If a flickering or a blinking image is seen, try to adjust the rotational switch to improve the cable skew. 0 stands for the strongest EQ while 7 stands for the weakest. Try adjusting the EQ from 7 to 0





1.8 Installation

To setup Avenview HDM3D-C53X-SET follow these steps for connecting to a device:

1. Connect your HDMI/DVI source (such as a Blu-ray Disc player) to Transmitter (HDM3D-C53X-S).
2. Connect your HDMI/DVI display (such as a LCD TV) to the receiving unit HDM3D-C53X-R.
3. Connect your CAT-5/5e/6 LAN cable between the transmitting and receiving units.
4. Make sure CAT-5/5e/6 LAN cable is tightly connected and not loose.
5. Plug in 5V DC power cord to the power jack of the receiving unit HDM3D-C53X-R.
6. Plug in 5V DC power cord to the power jack of the transmitting unit HDM3D-C53X-S.

1.9 EDID Learning

To learn EDID from the monitor/TV following these steps

1. Turn the Mode of HDM3D-C53X-S counterclockwise to 7.
2. Power on the HDM3D-C53X-S
3. Connect the HDMI cable to the HDM3D-C53X-S from the following DISPLAY/Projector
4. The LED on the RJ-45 of HDM3D-C53X-S will dim and light again, which indicates the EDID learning process is finished.
5. Turn the Mode of HDM3D-C53X-S clockwise from 7 to 0 (for surround sound) or 1 (for stereo).
6. Connect HDM3D-C53X-S and the video source CAT5/6 to HDM3D-C53X-R through a HDMI cable and enjoy the experience.

DO NOT let the rotary arrow pass through 6 which will erase the EDID just learned and restore to default EDID.



1.10 General Troubleshooting

Problem	Possible Solution
No Image	<ul style="list-style-type: none"> Check if connection to the source and the display are correct. Ensure that display device supports 480p, 720p and 1080p resolution
Screen Defects Appear	<ul style="list-style-type: none"> This product supports up to 1080p (1920x1200) resolution. Check the DVI and HDMI connection If outputting from a PC. Check the maximum resolution range of the graphics card.

Section 2: Specifications

Item	Description	
Units	HDM3D-C53X-S	HDM3D-C53X-R
Unit Description	HDMI with 3D Transmitter	HDMI with 3D Receiver
HDMI Compliance	High Speed HDMI Deep Color & Full 3D Support	
HDCP Compliance	Yes	
Video Bandwidth	Single Link 225 MHz (6.75Gbps)	
Supported Resolutions	480i / 480p / 720p / 1080i / 1080p60	
Resolution and Distance (24-bit)	Full HD: (1080p) ~40meter (130feet) (CAT5e) / 50meter (165feet) (CAT6) HD: (720p/1080i)-50meter (165feet) (CAT5e) / 60meter (200feet) (CAT6)	
Audio Support	Surround Sound (up to 7.1 Ch) or Stereo Digital Audio	
Equalization	-	8 Level Digital Control
Input TMDS Signal	1.2 Volts (peak-to-peak)	
Input DDC Signal	5 Volts (peak-to-peak, TTL)	
ESD Protection	- Human body model — ±15kV (air-gap discharge) & ±8kV (contact discharge) - Core chipset — ±8kV	
Input	1 x HDMI	1 x RJ45
Output	1 x RJ45	1 x HDMI
HDMI Connector	Type A (19 pin female)	
RJ45 Connector	WE/SS 8P8C with 2 LED indicators	
Rotary Switch	Mode	EQ
Dimensions	(Tx: 3.7" Rx: 3.3") x (Tx: 2.4" Rx: 1.5") x (Tx: 0.8" Rx: 0.8")	
Power Supply	5V DC / USB	
Power Consumption	1 Watt (max)	
<i>Environmental</i>		
Operating Temperature	32° ~ 104°F (0° to 40°C)	
Storage Temperature	-4° ~ 140°F (-20° ~ 60°C)	
Relative Humidity	20~90% RH (no condensation)	





Disclaimer

While every precaution has been taken in the preparation of this document, Avenview Inc. assumes no liability with respect to the operation or use of Avenview hardware, software or other products and documentation described herein, for any act or omission of Avenview concerning such products or this documentation, for any interruption of service, loss or interruption of business, loss of anticipatory profits, or for punitive, incidental or consequential damages in connection with the furnishing, performance, or use of the Avenview hardware, software, or other products and documentation provided herein.

Avenview Inc. reserves the right to make changes without further notice to a product or system described herein to improve reliability, function or design. With respect to Avenview products which this document relates, Avenview disclaims all express or implied warranties regarding such products, including but not limited to, the implied warranties of merchantability, fitness for a particular purpose, and non-infringement.

