



2X8 HDMI 1.3 Extender / Splitter over Single CAT5



Model #: HDMI-C5SP-8

HD ready 1080p **HDMI HDCP** **7.1CH Audio** **X.V.Color**

© 2009 Avenview Inc. All rights reserved.

The contents of this document are provided in connection with Avenview Inc. ("Avenview") products. Avenview makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication and reserves the right to make changes to specifications and product descriptions at any time without notice. No license, whether express, implied, or otherwise, to any intellectual property rights is granted by this publication. Except as set forth in Avenview Standard Terms and Conditions of Sale, Avenview assumes no liability whatsoever, and disclaims any express or implied warranty, relating to its products including, but not limited to, the implied warranty of merchantability, fitness for a particular purpose, or infringement of any intellectual property right. Reproduction of this manual, or parts thereof, in any form, without the express written permission of Avenview Inc. is strictly prohibited.

Table of Contents

Section 1: Getting Started	3
1.1 Important Safeguards	3
1.2 Safety Instructions	3
1.3 Regulatory Notices Federal Communications Commission (FCC)	4
1.4 Introduction	4
1.5 Package Contents.....	6
1.6 Before Installation.....	6
1.7 Panel Description	7
1.7.1 Rear Panel	7
1.8 IR Control	7
1.7.3 Dip Switch for EDID & Audio Settings	8
1.9 Installation	9
Section 2: Specifications.....	10

Section 1: Getting Started

1.1 Important Safeguards

Please read all of these instructions carefully before you use the device. Save this manual for future reference.

What the warranty does not cover

- Any product, on which the serial number has been defaced, modified or removed.
- Damage, deterioration or malfunction resulting from:
 - Accident, misuse, neglect, fire, water, lightning, or other acts of nature, unauthorized product modification, or failure to follow instructions supplied with the product.
 - Repair or attempted repair by anyone not authorized by us.
 - Any damage of the product due to shipment.
 - Removal or installation of the product.
 - Causes external to the product, such as electric power fluctuation or failure.
 - Use of supplies or parts not meeting our specifications.
 - Normal wear and tear.
 - Any other causes which does not relate to a product defect.
- Removal, installation, and set-up service charges.

1.2 Safety Instructions

The Avenview HDMI-C5SP-8 HDMI 1.3 Extender / Splitter over CAT5 has been tested for conformance to safety regulations and requirements, and has been certified for international use. However, like all electronic equipment's, the HDMI-C5SP-8 should be used with care. Read the following safety instructions to protect yourself from possible injury and to minimize the risk of damage to the unit.

- Do not dismantle the housing or modify the module.
- Dismantling the housing or modifying the module may result in electrical shock or burn.
- Refer all servicing to qualified service personnel.
- Do not attempt to service this product yourself as opening or removing housing may expose you to dangerous voltage or other hazards
- Keep the module away from liquids.
- Spillage into the housing may result in fire, electrical shock, or equipment damage. If an object or liquid falls or spills on to the housing, unplug the module immediately.
- Have the module checked by a qualified service engineer before using it again.
- Do not use liquid or aerosol cleaners to clean this unit. Always unplug the power to the device before cleaning.

1.3 Regulatory Notices Federal Communications Commission (FCC)

This equipment has been tested and found to comply with Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

Any changes or modifications made to this equipment may void the user's authority to operate this equipment.

1.4 Introduction


The Avenview HDMI-C5SP-8 HDMI 1.3 over Single CAT5 Distribution Amplifier provides the most flexible solution by which the high definition video and high quality audio can be transmitted to different locations over a long distance. The devices are cascadable, allowing you to extend HDMI compliant displays almost anywhere. The 2 input HDMI source (only 1 input can be used at a time) can be duplicated and distributed to up to 8 HDMI enable displays through cost effective Cat-5/5e cables and RJ-45 to HDMI mini-extenders HDMI-C5-R-M. With the built in equalization, the input HDMI cable can be extended up to 20 meters (66 feet) long under Full HD, and make the overall transmission distance superior than regular HDMI splitters or matrix switches in the market.

- Silicon Image chipset embedded for best quality, compatibility and reliability
- HDMI 1.3c compliant
- HDCP compliant
- Regenerates the HDMI signal
- Acts as 2X1 HDMI Switch and 1X8 HDMI over CAT5 Splitter
- Supports default HDMI EDID and has the ability to learn the EDID of the displays
- Supports default HDMI EDID and has the ability to learn the EDID of displays
- Extends up to 20m (66ft) of input HDMI cable
- Extends up to 60m (200ft) (720p / 1080i) of output CAT5/6 cable
- Extends up to 40m (130ft) (1080p) of output CAT5/6 cable
- Pure unaltered uncompressed 7.1ch digital HDMI over LAN cable transmission
- Allows cascading
- 1U rack mountable with interlocking power adapter for fixedness
- Perfectly integrated with other HDMI-C5XD Series products

HDMI-C5SP-8

LAYOUT 1

720p/1080i = 50m (165 feet) **CAT5**
 720p/1080i = 55m (200 feet) **CAT6**
 1080p = 30m (130 feet) **CAT5**
 1080p = 40m (165 feet) **CAT6**

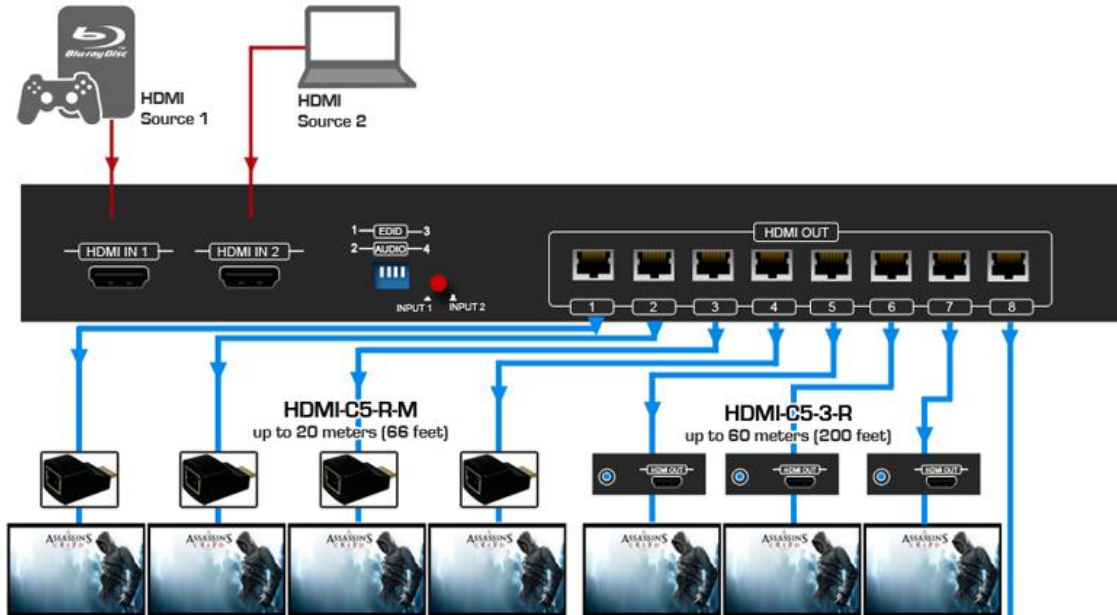

CABLE INDEX

- Output
- Input / Source
- S/PDIF
- Audio
- RS-232
- IR
- CAT-5 / CAT-6
- DVI Loop



Can be Cascaded further using multiple **HDMI-C5XD-SR** devices

1.5 Package Contents

Before you start the installation of the converter, please check the package contents.


- HDMI-C5SP-8 x 1
- Rack-mounting ears x 2
- Power Adapter x 1
- User's Manual x 1

1.6 Before Installation

- Put the product in an even and stable location. If the product falls down or drops, it may cause an injury or malfunction.
- Don't place the product in too high temperature (over 50°C), too low temperature (under 0°C) or high humidity.
- Use the DC power adapter with correct specifications. If inappropriate power supply is used then it may cause a fire.
- Do not twist or pull by force ends of the optical cable. It can cause malfunction.

1.7 Panel Description

1.7.1 Rear Panel

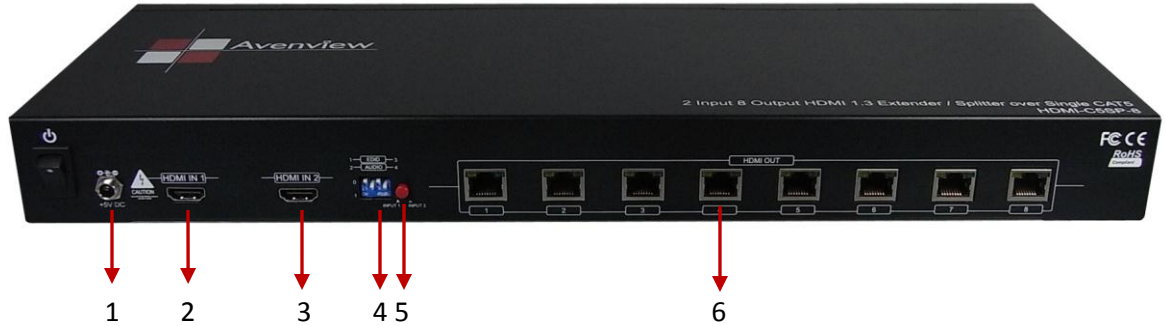









1. Power Jack	2. HDMI Input 1
3. HDMI Input 2	4. DIP Switches (details below)
5. HDMI Input Source Selection (1 & 2)	6. HDMI Output over RJ45 (1 – 8)

1.8 IR Control

Function Key	Function Description
Power	Turn On/Off HDMI transmission on all 8 Output Ports
	Switch to the other channel from either HDMI INPUT 1 or HDMI INPUT 2 that is in play
	Switch to the other channel from either HDMI INPUT 1 or HDMI INPUT 2 that is in play
SOURCE SELECT 1	Select HDMI INPUT 1 to be the input source
SOURCE SELECT 2	Select HDMI INPUT 2 to be the input source
F1	Mute on/off (audio off, video on) on all eight output ports











1.7.3 Dip Switch for EDID & Audio Settings

DIP Switch Position		Video	Audio	Description
PIN # 1	PIN # 2			
OFF 	OFF 	1080p	Stereo ¹	Default Mode ² : Up to 1080p & Stereo output.
OFF 	ON 	720p/1080i	Stereo	Safe Mode ³ : Forces system to output at 720p/1080i with Stereo Audio.
ON 	OFF 	Bypass ⁴	Bypass	EDID Learning Mode ⁵ : for learning EDID from the display while playing any received HDMI Audio format.
ON 	ON 	Bypass	Stereo	EDID Learning & Stereo Mode : For learning EDID from the display while enforcing stereo output.



1 Pin-1 and pin-2 are for HDMI INPUT 1; while pin-3 and pin-4 are for HDMI INPUT 2

2 If the HDTV shows video but without audio, please set audio mode to stereo.

3 Factory default setting is pin-1 at OFF[], pin-2 at OFF[], pin-3 at OFF[] & pin-4 at OFF[] for 1080p with stereo.

4 If you encounter any unsolved audio/video output problem during system installation, please dial the DIP switch to pin-1 at OFF[], pin-2 at ON[], pin-3 at OFF[], & pin-4 at ON[] for safe mode to enforce the most compatible 720p stereo output for system check. However, the safe mode cannot be initiated if your HDMI sources are set to enforce 1080p output. In this case, please reconfigure your HDMI source to all resolution output for troubleshooting.

5 Bypass means this device will maintain playing the original format of HDMI signals in video and perhaps audio. By setting at this mode, the users may encounter compatibility issue among different kinds of HDMI sources and displays. If you cannot get the audio and/or video output normally at the system installation, please change the DIP switch setting to default mode or even safe mode to verify the functionality of the device.

6 To learn the EDID of HDMI display for respective HDMI source devices, set (pin-1 and/or pin-3) at ON[] first then connect the HDTV sets to respective HDMI inputs via HDMI cables. Then please wait for 20 seconds for completing the EDID learning procedure. If you want to learn the EDID from another HDTV, you must set pin-1 and/or pin-3) at OFF[] first and repeat this procedure all over again.



1.9 Installation

To setup Avenview HDMI-C5SP-8 follow these steps for connecting to a device:

1. Turn off all devices including monitors / TV
2. Connect to a HDMI source (such as a Blu-Ray Disc player) to HDMI Input of HDMI-C5SP-8
3. Connect the receiver HDMI-C5-3-R or HDMI-C5-R-M to HDMI-C5SP-8 from RJ45 Out with CAT5 / CAT6 cable
4. Plug in 5V 4A DC Power (supplied).
5. Power on the HDMI display
6. Power on HDMI Sources.

Section 2: Specifications

Item	Description
Units	HDMI-C5SP-8
Unit Description	2x8 HDMI 1.3 Transmitter / Splitter over CAT5 / CAT6
HDMI Compliance	HDMI 1.3c
HDCP Compliance	Yes
Video Bandwidth	Single Link 225 MHz (6.75Gbps)
Supported Resolutions	480i / 480p / 720p / 1080i / 1080p60
Resolution and Distance	Full HD: (1080p) ~ 40meter (130feet) (CAT5e) / 50meter (165feet) (CAT6) HD: (720p/1080i) ~ 50meter (165feet) (CAT5e) / 60meter (200feet) (CAT6)
Audio Support	Surround Sound (up to 7.1 Ch) or Stereo Digital Audio
Equalization	-
Input TMDS Signal	1.2 Volts (peak-to-peak)
Input DDC Signal	5 Volts (peak-to-peak, TTL)
ESD Protection	- Human body model — ±15kV (air-gap discharge) & ±8kV (contact discharge) - Core chipset — ±8kV
Input	2 x HDMI
Output	8 x RJ45
HDMI Connector	Type A (19 pin female)
RJ45 Connector	WE/SS 8P8C with 2 LED indicators
Dimensions (L x W x H)	17" x 6.2" x 1.8"
Power Supply	5V 4A DC
Power Consumption	13 Watt (max)

Environmental

Operating Temperature	32° ~ 104°F (0° to 40°C)
Storage Temperature	-4° ~ 140°F (-20° ~ 60°C)
Relative Humidity	20~90% RH (no condensation)

Notice

1. *If the DVI or HDMI device requires the EDID information, please use EDID Reader/Writer to retrieve and provide DVI/HDMI EDID information.*
2. *All HDMI over CAT5 transmission distances are measured using Belden 1583A CAT5e 125MHz LAN cable and ASTRODESIGN Video Signal Generator VG-859C.3*
3. *The transmission length is largely affected by the type of LAN cables, the type of HDMI sources, and the type of HDMI display. The testing result shows solid LAN cables (usually in bulk cable 300m or 1000ft form) can transmit a lot longer signals than stranded LAN cables (usually in patch cord form). Shielded STP cables are better suit than unshielded UTP cables. A solid UTP CAT5e cable shows longer transmission length than stranded STP CAT6 cable. For long extension users, solid LAN cables are your only choice.*
4. *EIA/TIA-568-B termination (T568B) for LAN cables is recommended for better performance.*
5. *To reduce the interference among the unshielded twisted pairs of wires in LAN cable, you can use shielded LAN cables to improve EMI problems, which is worsen in long transmission.*
6. *Because the quality of the LAN cables has the major effects in how long transmission distance will be made and how good is the received display, the actual transmission length is subject to your LAN cables. For resolution greater than 1080i or 1280x1024, a CAT6 cable is recommended.*
7. *If your HDMI display has multiple HDMI inputs, it is found that the first HDMI input [HDMI input #1] generally can produce better transmission performance among all HDMI inputs.*



Disclaimer

While every precaution has been taken in the preparation of this document, Avenview Inc. assumes no liability with respect to the operation or use of Avenview hardware, software or other products and documentation described herein, for any act or omission of Avenview concerning such products or this documentation, for any interruption of service, loss or interruption of business, loss of anticipatory profits, or for punitive, incidental or consequential damages in connection with the furnishing, performance, or use of the Avenview hardware, software, or other products and documentation provided herein.

Avenview Inc. reserves the right to make changes without further notice to a product or system described herein to improve reliability, function or design. With respect to Avenview products which this document relates, Avenview disclaims all express or implied warranties regarding such products, including but not limited to, the implied warranties of merchantability, fitness for a particular purpose, and non-infringement.