



CVSB/ S-video/ HDMI to HDMI Scaler with 720p and 1080p Switching.



Model #: C-CVID-HDM



© 2012 Avenview Inc. All rights reserved.

The contents of this document are provided in connection with Avenview Inc. ("Avenview") products. Avenview makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication and reserves the right to make changes to specifications and product descriptions at any time without notice. No license, whether express, implied, or otherwise, to any intellectual property rights is granted by this publication. Except as set forth in Avenview Standard Terms and Conditions of Sale, Avenview assumes no liability whatsoever, and disclaims any express or implied warranty, relating to its products including, but not limited to, the implied warranty of merchantability, fitness for a particular purpose, or infringement of any intellectual property right.

Table of Contents

Section 1: Getting Started	3
1.1 Important Safeguards	3
1.2 Safety Instructions	3
1.3 Regulatory Notices Federal Communications Commission (FCC)	4
1.4 Introduction	4
1.5 Package Contents.....	4
1.6 Before Installation.....	5
1.7 Parts Required	5
1.8 Panel Description	6
1.9 Installation Hardware	7
1.10 General Troubleshooting	7
Section 2: Specifications.....	7

Section 1: Getting Started

1.1 Important Safeguards

Please read all of these instructions carefully before you use the device. Save this manual for future reference.

What the warranty does not cover

- Any product, on which the serial number has been defaced, modified or removed.
- Damage, deterioration or malfunction resulting from:
- Accident, misuse, neglect, fire, water, lightning, or other acts of nature, unauthorized product modification, or failure to follow instructions supplied with the product.
- Repair or attempted repair by anyone not authorized by us.
- Any damage of the product due to shipment.
- Removal or installation of the product.
- Causes external to the product, such as electric power fluctuation or failure.
- Use of supplies or parts not meeting our specifications.
- Normal wear and tear.
- Any other causes which does not relate to a product defect.
- Removal, installation, and set-up service charges.

1.2 Safety Instructions

The C-CVID-HDM converter has been tested for conformance to safety regulations and requirements, and has been certified for international use. However, like all electronic equipment's, the C-CVID-HDM should be used with care. Read the following safety instructions to protect yourself from possible injury and to minimize the risk of damage to the unit.

- Do not dismantle the housing or modify the module.
- Dismantling the housing or modifying the module may result in electrical shock or burn.
- Refer all servicing to qualified service personnel.
- Do not attempt to service this product yourself as opening or removing housing may expose you to dangerous voltage or other hazards
- Keep the module away from liquids.
- Spillage into the housing may result in fire, electrical shock, or equipment damage. If an object or liquid falls or spills on to the housing, unplug the module immediately.
- Have the module checked by a qualified service engineer before using it again.
- Do not use liquid or aerosol cleaners to clean this unit. Always unplug the power to the device before cleaning.

1.3 Regulatory Notices Federal Communications Commission (FCC)

This equipment has been tested and found to comply with Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

Any changes or modifications made to this equipment may void the user's authority to operate this equipment.

1.4 Introduction

Avenview C-CVID-HDM Converter Scaler enhances the quality of your Standard Definition (Analog signal) either CVBS (Composite) or S-Video input signal to any HDMI Display to a crisp Digital 1080p output signal supporting audio on the HDMI output. With this device analog devices can be added to any HD home theater design with confidence and now that "older analog device" doesn't have to sit in the garage or upgrade them to new devices.

- Up-scales Composite Video or S-Video up to full HD 1080p;
- Composite Video , S-video and HDMI can connect simultaneously;
- Switch selector to switch between Digital or Analog signals;
- LED Indicators –**RED** HDMI output is optional at 720P 50Hz/60Hz;
- LED Indicators –**Green** 1080P 50Hz/60Hz;
- Composite Vide and S-Video Share the same audio input
- Supports OSD (One Screen Display)
- Automatic NTSC/PAL video format detection
- Auto Save Settings-Last input signal and output resolution when Device is Powered off

1.5 Package Contents

Before you start the installation of the converter, please check the package contents.

- | | |
|-------------------------|-----|
| - C-VID-HDM | x 1 |
| - Wall Adapter DC 5V/2A | x1 |
| - User's Manual | x1 |


1.6 Before Installation

- Put the product in an even and stable location. If the product falls down or drops, it may cause an injury or malfunction.
- Don't place the product in too high temperature (over 50°C), too low temperature (under 0°C) or high humidity.
- Use the DC power adapter with correct specifications. If inappropriate power supply is used then it may cause a fire.
- Do not twist or pull by force ends of the Composite, S-Video and HDMI. It can cause malfunction.

1.7 Parts Required

1	C-CVID-HDM	
1	HDMI CABLE OUTPUT	
1	CVSB OR S-VIDEO CABLE INPUT	
1	Composite/S-Video Source	
1	HDMI MONITOR	 LCD OR HD MONITOR

1.8 Panel Description

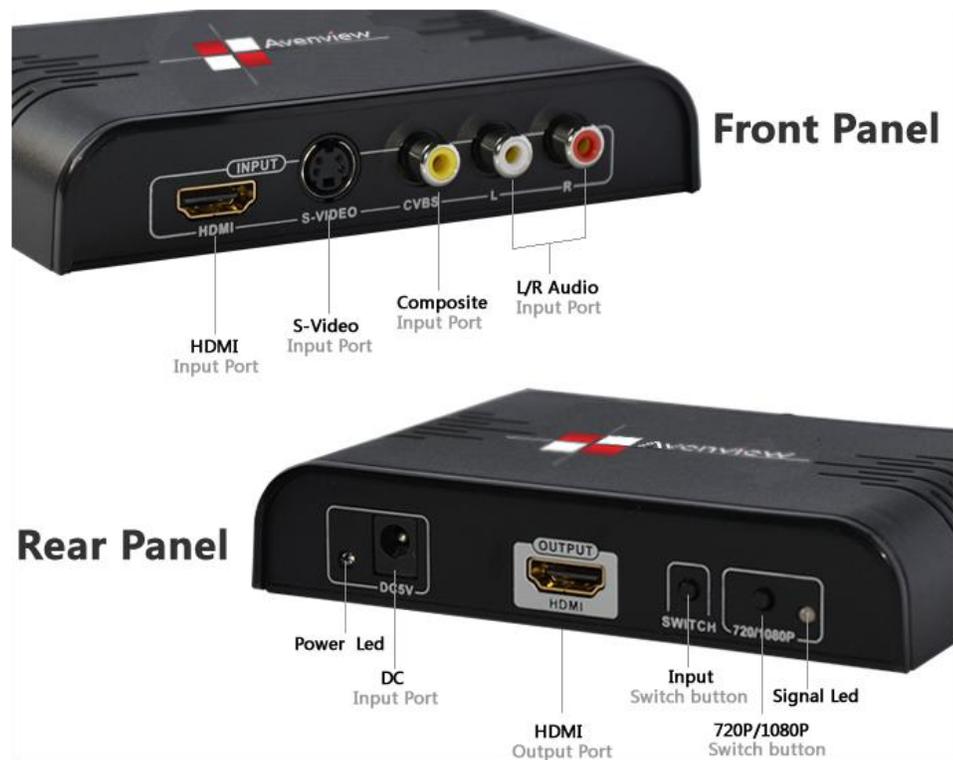

1. HDMI Input

Connect the HDMI Type A (19 PIN Connector). Support Audio and Video.

2. Stereo Analog Audio Input

Red/White RCA stereo analog audio inputs.

3. Composite Analog Video Input

CVBS (Composite video input).

4. S-Video Analog Video Input

S-Video video input.

4. 5V DC Power Supply Input

Connection for the 5V DC power supply included.

5. Power LED

This LED will become active once the included power supply is properly connected.

6. HDMI output

Connect the HDMI display to this output connector with M-M HDMI cable. Support Audio and Video.

7. Switch Selector

S-Video/CVBS/HDMI input Switch

8. 720P/1080P Button

Output resolution switch

9. Resolution LED

720P/60Hz: Led light RED

1080P/60Hz: Led light GREEN

1.9 Installation Hardware

1. Power On source such as DVD, Camera or Gaming System
2. Connect your C-CVID-HDM to source device with composite or S-video
3. Connect Male to Male HDMI to HDMI Output of C-VID-HDM
4. Connect other end of HDMI cable to TV or projector with HDMI input

1.10 General Troubleshooting

Problem	Possible Solution
No image output or abnormal display	Re-Cycle the power on Display
Image is not as clear	Please check the all cable input connections
Video -No Sound	Please ensure the RED and White RCA connections are secure.

Section 2: Specifications

Item	Description
Units	C-CVID-HDM
Unit Description	CVSB/ S-video/ HDMI to HDMI Scaler with 720p and 1080p Switching
HDMI Compliance	HDMI 1.3
Supported HDMI Input Resolutions	480i@60Hz、480p@60Hz,576i@50Hz、576p@50Hz,720p@50/60Hz,1080i@50/60Hz,1080p@50/60Hz
Supported HDMI graphic card Resolution	resolution:640x480@60Hz,800x600@60Hz,1024x768@60Hz,1280x720@60Hz,1280x768@60Hz,1280x1024@60Hz,1360x768@60Hz,1366x768@60Hz,1400x1050@60Hz,1440x900@60Hz,1680x1050@60Hz,1920x1080@60Hz
Frame Conversion	Supports 50Hz to 60Hz frame rate conversion
Video Detection	Automatic NTSC/PAL video format detection
Input	1 x HDMI 1 X CVBS (composite) 1 x S-VIDEO
Output	1 x HDMI
HDMI Connector	Type A (19 pin female)
S-VIDEO/CVBS Audio	4 pin female/3 RCA Female Connectors
Dimensions (L x W x H)	3" x 2" x 0.6"
Power Supply	DC 5V/2A
Power Consumption	3W
Environmental	
Operating Temperature	32° ~ 104°F (0° to 40°C)
Storage Temperature	-4° ~ 140°F (-20° ~ 60°C)
Relative Humidity	20~90% RH (no condensation)



Disclaimer

While every precaution has been taken in the preparation of this document, Avenview Inc. assumes no liability with respect to the operation or use of Avenview hardware, software or other products and documentation described herein, for any act or omission of Avenview concerning such products or this documentation, for any interruption of service, loss or interruption of business, loss of anticipatory profits, or for punitive, incidental or consequential damages in connection with the furnishing, performance, or use of the Avenview hardware, software, or other products and documentation provided herein.

Avenview Inc. reserves the right to make changes without further notice to a product or system described herein to improve reliability, function or design. With respect to Avenview products which this document relates, Avenview disclaims all express or implied warranties regarding such products, including but not limited to, the implied warranties of merchantability, fitness for a particular purpose, and non-infringement.