

## C-HDM-COMPVGA-A

### HDMI to VGA/Component Converter



#### KEY FEATURES

- Support video input: HDMI;
- Toggle switch YPbPr/VGA;
- Support audio output: SPDIF (Optical) + R/L analog;
- Support output: Support up to PC UXGA and Video 1080i (50/60Hz);
- HDCP compliant;
- LED: Source / Sink working, LED;
- No loss of quality;
- DC5V/1A power supply.

## C-HDM-COMPVGA-A


#### CABLE INDEX

- Output
- Input / Source
- Audio



ITEM	TECHNICAL SPECIFICATION
Weight	380 g
Power adapter format	DC5V/1A, 100V-240V
Operating Temperature	-15 to +55°C
Operating Humidity	5 to 90%RH (No Condensation)
Dimensions (L x W x H)	7" x 2.5" x 1"

#### PANEL DESCRIPTION

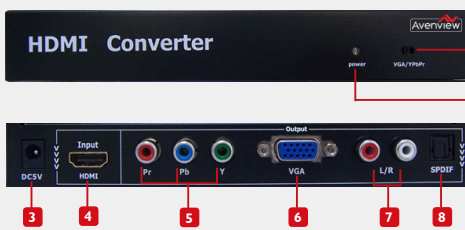

- |                                 |                          |
|---------------------------------|--------------------------|
| <b>1</b> VGA / COMPONENT Switch | <b>2</b> Power Indicator |
| <b>3</b> Power Supply Connector | <b>4</b> HDMI Input      |
| <b>5</b> Component Output       | <b>6</b> VGA Output      |
| <b>7</b> Audio Output           | <b>8</b> Optical Output  |



ITEM	SPECIFICATION
<b>Model</b>	C-HDM-COMPVGA-A
<b>Unit Description</b>	HDMI / DVI to Component / VGA with Audio Converter
<b>HDMI Compliance</b>	HDMI 1.3b
<b>Video Bandwidth</b>	Single Link: 225MHz (5.1Gbps)
<b>HDMI Connector</b>	Type A (19 pin female)
<b>Audio Support</b>	SPDIF(Optical) + R/L Analog
<b>Video Support</b>	Single Link: 1080p 60, WUXGA (1920x1200@60Hz) Component Video: 720p / 1080i
<b>Input</b>	1 x HDMI
<b>Output</b>	1 x VGA, 1 x Optical Digital 1 x YPbPr ComponentAudio 1 x L/R Stereo Audio
<b>Power Supply</b>	5V 1A DC
<b>Max Working Current</b>	600mA