

SC-MLT-DVI-4

Multi-Format to DVI Scaler



DVI, Composite Video, VGA, S-Video
To DVI Scaler


KEY FEATURES

- Supports scaling and source-switching from Composite Video, S-Video, VGA and DVI input to DVI output;
- Supports synchronized output for input video and output audio signals;
- Supports 3D de-interlacing, noise reduction and Comb filter;
- Supports frame rate conversion;
- Supports control via RS-232, IR Remote handset and front panel.

MECHANICAL SPECIFICATIONS

Housing	Metal Case
Dimensions (L X W X H)	8.5" x 6.5 x 1.9"
Weight	2.1 lbs
Power Supply	5 V/2.6 A DC (US/EU, CE/FCC/UL certified)
Operating Temperature	0~40°C [32~104°F]
Storage Temperature	20~60°C [-4~140°F]
Relative Humidity	20-90% RH [No Condensation]

PANEL DESCRIPTION

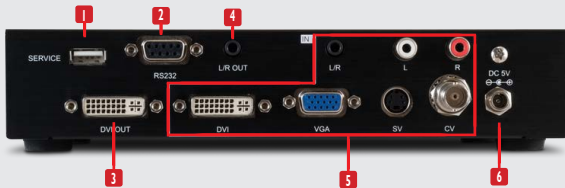


- | | | |
|------------------------|--|---------------------|
| 1 USB / Service | 2 RS-232 | 3 DVI Out |
| 4 L /R Out | 5 Input Ports: DVI, VGA (PC), CV and L/R, SV and L/R, L/R | 6 Power Jack |



SC-MLT-DVI-4

CABLE INDEX

- DVI INPUT/OUTPUT
- VGA
- CVBS
- S-VIDEO
- RS-232
- AUDIO INPUT 3.5MM
- AUDIO INPUT RCA

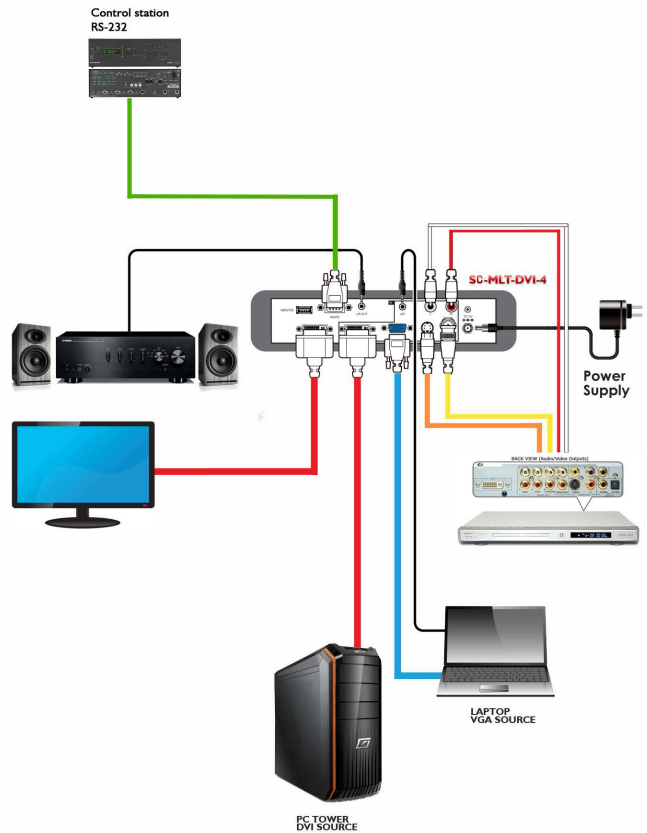

ITEM

SPECIFICATION

Model	SC-MLT-DVI-4
Video Bandwidth	165 MHz
Input Ports	1xDVI, 1xVGA, 1xS-Video, 1xComposite, Video, 1xAnalog Stereo (L/R), 1x3.5mm, Mini-jack, 1xRS-232, 1xUSB (Service Only)
Output Ports	1xDVI, 1x3.5mm Mini-jack
Input Resolution	Up to 1080p & WUXGA (RB)
Output Resolution	Up to 1080p & WUXGA (RB)



VIDEO WALL VIDEO PROCESSORS
MULTIVIEWERS DIGITAL SIGNAGE
EXTENDERS CONTROL CENTERS
SCALERS WIRELESS



Toll Free 1.866.508.0269 | sales@avenview.com