

# Fiber Optic Series Power Adapter Specifications



Model #: PS-FO-DVI

© 2010 Avenview Inc. All rights reserved.

The contents of this document are provided in connection with Avenview Inc. ("Avenview") products. Avenview makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication and reserves the right to make changes to specifications and product descriptions at any time without notice. No license, whether express, implied, or otherwise, to any intellectual property rights is granted by this publication. Except as set forth in Avenview Standard Terms and Conditions of Sale, Avenview assumes no liability whatsoever, and disclaims any express or implied warranty, relating to its products including, but not limited to, the implied warranty of merchantability, fitness for a particular purpose, or infringement of any intellectual property right. Reproduction of this manual, or parts thereof, in any form, without the express written permission of Avenview Inc. is strictly prohibited.

SER GUID

### **Table of Contents**

Section 1: Specifications	3
2.1 Adapter Specifications	3
2.2 Safety Requirement	3
2.3 DC Output Cord Drawing	4



## Section 1: Specifications

### 2.1 Adapter Specifications


Item	Description		
Input Plug Type	2-PIN US-PIN (Live, Neutral)		
Output Cord	WIRE	18AWG/2C, 1828mm	
Output Cord Pl	PLUG	JACK PLUG 3.5*1.35*8.5mm	
Operating Temperature	0°C - 40°C		
Storage Temperature	-20°C - 60°C		
Operating Humidity	20 ~ 85% RH, Non-Condensing		
Storage Humidity	5 ~ 95% RH, Non-Condensing		

## 2.2 Safety Requirement

Item	Description	
Dielectric Withstanding Voltage Test (HI-POT TEST)	Primary to Secondary: 3000VAC 10mA 1 minute or 4242VDC 10mA 1 minute	
Leakage Current	0.25mA Max, at nominal AC input Voltage and Frequency	
Safety Standard	Design to meet UL/CUL (UL60950-1)	
EMI Standard	Designed to meet FCC Part 15 Class B	

DVE Switchi	ng Adapte	er 🔪
MODEL: DSA-0101F-05	A	I.T.E L.P.S
INPUT: 100-240V~ 50/6	0Hz 0.3A	LISTED
OUTPUT: +5V 2A	Θ€⊕	81GJ E135856
LEVEL 3		
		(Ui)
		c Sus
	Made In China	(F)



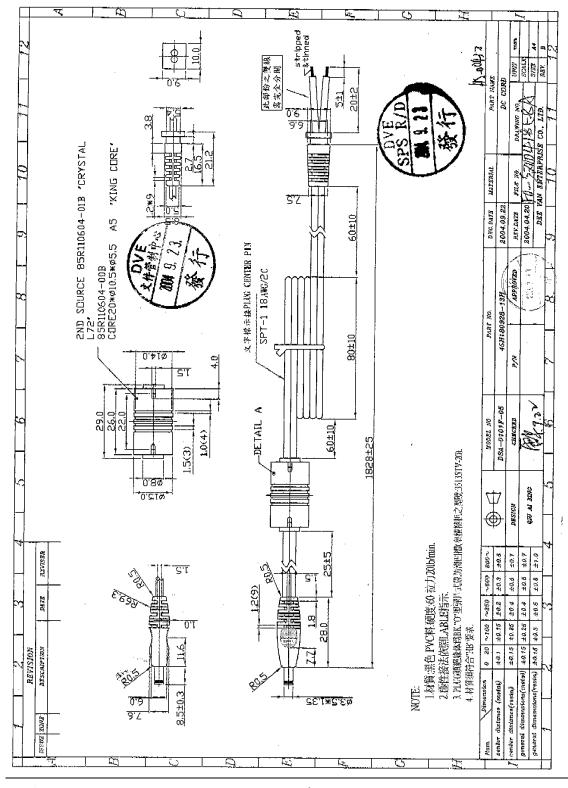

### 2.3 DC Output Cord Drawing

Avenview

# Avenview

### Disclaimer

While every precaution has been taken in the preparation of this document, Avenview Inc. assumes no liability with respect to the operation or use of Avenview hardware, software or other products and documentation described herein, for any act or omission of Avenview concerning such products or this documentation, for any interruption of service, loss or interruption of business, loss of anticipatory profits, or for punitive, incidental or consequential damages in connection with the furnishing, performance, or use of the Avenview hardware, software, or other products and documentation provided herein.

Avenview Inc. reserves the right to make changes without further notice to a product or system described herein to improve reliability, function or design. With respect to Avenview products which this document relates, Avenview disclaims all express or implied warranties regarding such products, including but not limited to, the implied warranties of merchantability, fitness for a particular purpose, and non-infringement.

