

C-HDM-EXD-A
HDMI AUDIO EXTRACTOR




HDMI AUDIO EXTRACTOR

KEY FEATURES


- Compliant with HDMI, HDCP 1.2 and DVI 1.0;
- Supports HDMI audio sampling rates up to 192 kHz;
- Supports TMDS clock frequency rate 225 MHz;
- Supports high-bit-rate (HBR) audio;
- No HDMI output connection is required to receive audio at the analog and optical outputs;
- Supports 3D signal;
- Low power consumption;

C-HDM-EXD-A

- CABLE INDEX**
- HDMI CABLE
 - DIGITAL AUDIO (OPTICAL)
 - ANALOG AUDIO L/R

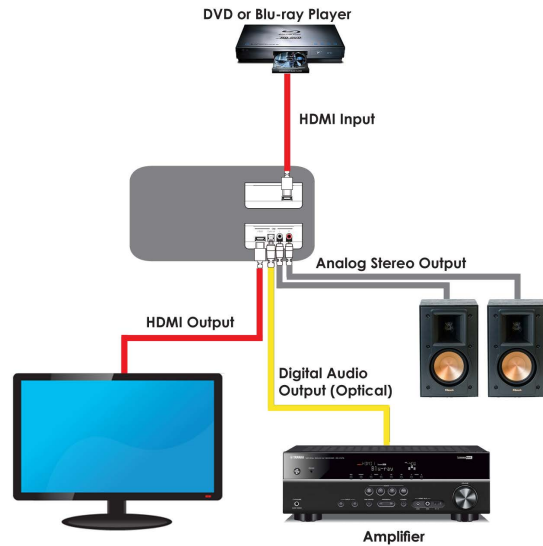

UNIT DESCRIPTION

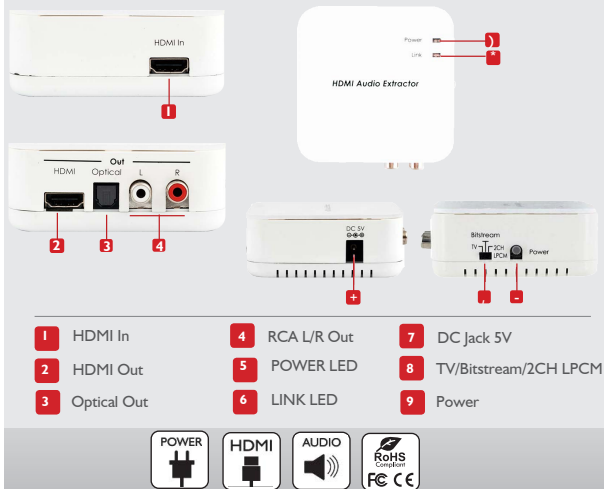

ITEM	SPECIFICATION
Description	HDMI Audio Extractor
Input Port	1 × HDMI
Output Ports	1 × HDMI, 1 × Optical, 1 × L/R
HDMI Audio Sampling Rate	Up to 192 kHz
Optical Audio Sampling Rate	Up to 48 kHz
Power Consumption	2.1 W
Power Supply	5 V/1 A linear power adaptor (US/EU Standards)
Dimensions	90.7 mm (W) × 85.8 mm (D) × 34 mm (H)
Weight	107 g
HDMI Audio Format	LPCM 2/5.1/7.1 CH, Dolby 5.1, DTS 5.1, DD+, D-TrueHD & DTS-HD
Optical Audio Format	LPCM 2CH, Dolby 5.1 & DTS 5.1