

HDM-SPLITPRO-4K

4x1 HDMI Quad Multiviewer with Scaler on Output 4K@30 UHD



QUAD MULTIVIEWER AND SCALER


KEY FEATURES

- Fast switching between input channels and combined multiple images on single HD monitor;
- Crop the (4) four HDml Input Channels;
- Supports plp, pAp and multi-windows layout configurations;
- Single Input Rotation (90° left & right) functions;
- 8 preset Hot keys with 4 Custom layouts and 4 Full screen layouts within the supplied control software;
- 8 Custom saved layout buttons via the IR Remote;
- Input resolution support full range of video resolutions up to WuXGA@60 (RB) or full HD1080p;
- Output resolution support Full HD or upscale to 4K@30 (3840x2160);
- Audio dembedded via RCA Left and Right audio connectors
- RS232 port for Service mode and firmware upgrade;
- Supports RS-232, Ethernet, IR Remote and front panel buttons;
- Factory Reset;

MECHANICAL SPECIFICATIONS

Housing	Metal Case
Dimensions	12.5" x 6.8" x 1.7"
Net Weight	2.9 lbs
Power Supply	12V 5A DC / 110-240V
Power Consumption	5W
Operating Temperature	0~40°C [32~104°F]
Storage Temperature Relative	20~60°C [-4~140°F]
Humidity	20-90% RH [No Condensation]


PANEL DESCRIPTION

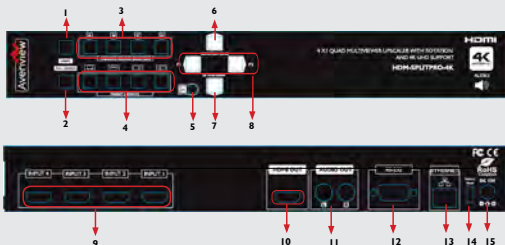

- | | |
|-------------------------------|-----------------------------|
| 1 Label | 2 Full Screen |
| 3 Source Selection A-D | 4 Preset Quad Layout |
| 5 IR Window | 6 Rotation |
| 7 4K@30/1080p | 8 Factory Reserved |
| 9 HDMI In 1-4 | 10 HDMI Out |
| 11 Stereo Audio L/R | 12 RS-232 |
| 13 Ethernet | 14 DIP Switch |
| 15 DC 12V | |



HDM-SPLITPRO-4K

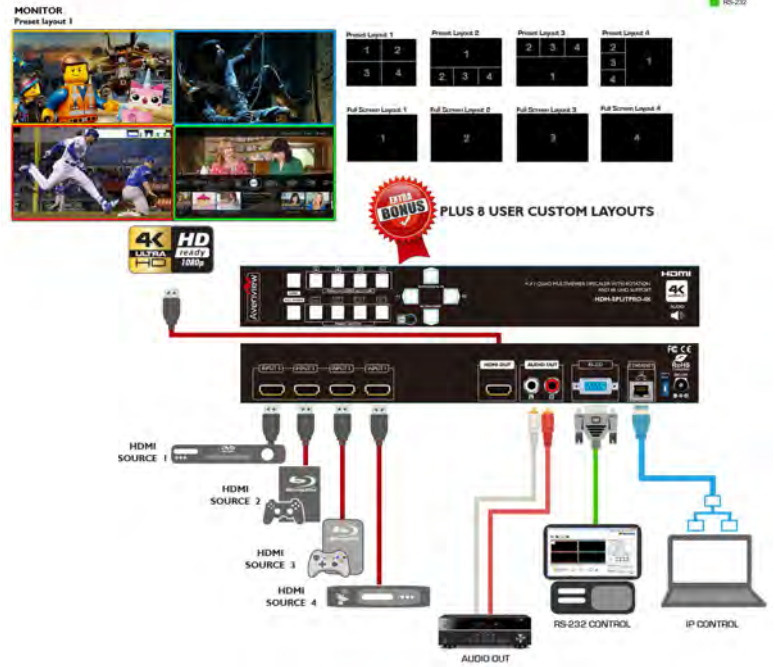

ITEM	SPECIFICATION
Model	HDM-SPLITPRO-4K
Model Description	4x1 HDMI Quad multiviewer with Rotation, 4K support on output Input:
Video Bandwidth	DVI (Single-link 4.95Gbps) HDMI (6.75Gbps) / Output: HDMI (10.2Gbps)
HDCP Compliance	Yes
HDMI Cable Distance	Up to 10m/1080p@8 bits /4K@30 UHD(3840x2160)
Audio Support	LPCM 2CH,6CH,8CH/AC3/DTS/Dolby Digital Plus/ Dolby TruHD & DTS-HD PC -VGA, XGA (1024 x 768), SXGA (1280 x 1024), UXGA (1600 x 1200), WUXGA (1920 x 1200)
Input Resolution	480i/720p/1080i/1080p@60
Output Resolution	720p 50Hz, 720p 60Hz, 1080p 24Hz,1080p 25Hz, 1080p 30Hz, 1080p 50Hz, 1080p 60Hz, 1920X1200RB Hz, 3840x2160 30 Hz
Output	1 x Hdml 19 pin female type connector
Input	4 x Hdml 19 pin female type connector, 1 x RJ45/RS-232
Dimensions	15.3" x 11.8" x 1.7" (L x W x H)
Size	1U Rack-mount with ears
Power Supply	12V/5A DC (US/EU standards, CE/FCC/UL certified)



VIDEO WALL VIDEO PROCESSORS
MULTIVIEWERS DIGITAL SIGNAGE
EXTENDERS CONTROL CENTERS
SCALERS WIRELESS



Toll Free 1.866.508.0269 | sales@avenview.com